


LUXUS

Is Your Coffee Fresh?

Driven To Pioneer Innovation

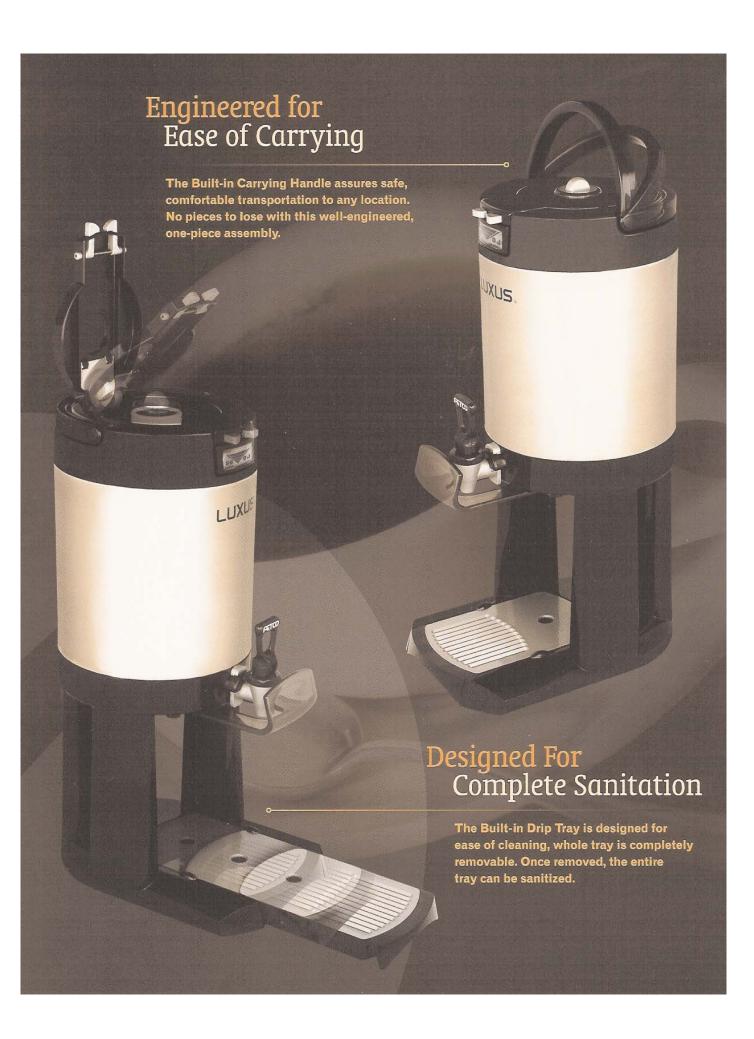

Freshness Timer™

Identify how long the beverage has been held by using the built in Freshness Timer™. The timer starts automatically as soon as the coffee enters the dispenser. An industry first – a wide open solid front for merchandising, and still know how much coffee is inside.

Now you can have both with the

<mark>Volume</mark> Indicator™



Each bar is equivalent to 0.25 Gallons



Displaying Half Full.



Displaying
Full Dispenser.

Guarded Faucet

Clear Guard guides operators to the faucet for fewer spills. Guard Design Protects the faucet from being touched by cups which will prevent cross contamination.





UXUS



1 hour and half after brewing.



3 hours and 15 minutes after brewing.

Vacuum Insulated Liner

Unsurpassed heat retention to keep coffee fresher, hotter, longer. Optimum heat retention and Maximum Durability.



Keep your serving area clean by using the Luxus® Thermal Dispenser with the Built-In Drip Tray.

Different Luxus® Thermal Dispensers

Models come with 3 different capacities:
1.0, 1.5 and 2.0 Gallons.







L3D-I5 Capacity of 1.5 Gallon

L3D-20 Capacity of 2.0 Gallon

Simply Versatile

The LUXUS® Thermal Dispensers have been depended upon to serve various functions, this versatile system can be put together modularly to fit all dispensing point needs.



L35-IO Capacity of 1.0 Gallon




S35-10-1 Single Stand for 1.0 Gallon LUXUS





535-10-2 Double Stand for 2x1.0 Gallon LUXUS



2xL35-IO Total Capacity of 2.0 Gallon





Specifications										
Model	SKU	Weight Empty Ibs [kg]	Weight Full Ibs [kg]	Depth w/Drip Tray inch [mm]	Height (Handle Down) inch [mm]	Height (Handle Up) inch [mm]	Diameter (Width) inch [mm]	Faucet Clearance w/ DripTray inch [mm]	Faucet Clearance w/o Drip'Tray inch [mm]	
L3D-I0	D-048	8 [3.6]	16.5 [7.5]	12 [305]	21.5 [546]	24.5 [622]	8 [203]	7.7 [196]	9 [229]	
L3D-I5	D-049	10.5 [4.8]	23 [10.4]	13.5 [343]	23 [584]	26.5 [673]	9 [229]	7.7 [196]	9 [229]	
L3D-20	D-050	11.5 [5.2]	27.5 [12.5]	13.5 [343]	25 [635]	28 [711]	9 [229]	7.7 [196]	9 [229]	
L35-I0	D-051	6 [2.7]	14 [6.4]		12.5 [318]	15.5 [394]	8 [203]	0 [0]	0 [0]	
L35-I5	D-052	8.5 [3.8]	17 [7.7]		14 [356]	17 [432]	9 [229]	0 [0]	0 [0]	
L35-20	D-053	9 [4.1]	25 [11.3]		15.5 [394]	19 [483]	9 [229]	0 [0]	0 [0]	
535-10-1	A-093	3.3 [1.5]		11.7 [297]	9.6 [244]		8 [203]	7.9 [201]	9.1 [231]	
535-10-2	A-094	5 [2.3]		12.4 [315]	10 [254]		17 [432]	7.9 [201]	9.1 [231]	
535-10-3	A-096	6.9 [3.1]		12.4 [315]	10 [254]		26 [660]	7.9 [201]	9.1 [231]	
535-15-1/535-20-1	A-097	4.1 [1.9]		13.2 [335]	9.8 [249]		9 [229]	7.9 [201]	9.3 [236]	
535-15-2/535-20-2	A-098	6.1 [2.8]		13.9 [353]	10.2 [259]		19 [483]	7.9 [201]	9.3 [236]	
535-15-3/535-20-3	A-099	8.1 [3.7]		13.9 [353]	10.2 [259]		29 [737]	7.9 [201]	9.3 [236]	

Specifications					Shipping				
Model	SKU	Accessories	Options	Brewers Used On	Width inch [mm]	Depth inch [mm]	Height Weight the [kg]		
L3D-I0	D-048		Z-053	CBS-2041/2042	9 [229]	12 [305]	22 [559]	10 [4.5]	
L3D-I5	D-049		Z-053	CBS-51H/52H/51H15/52H15/2051/2052	10 [254]	14 [356]	24 [610]	13 [5.9]	
L3D-50	D-050		Z-053	CBS-52H-20/2052 (2.0 Gallon)	10 [254]	14 [356]	26 [660]	14 [6.4]	
L3S-10	D-051	A-093/94/96	Z-053	CBS-2031/2032	8.5 [216]	9.8 [249]	13.3[338]	8 [3.6]	
L35-15	D-052	A-097/98/99	Z-053		9.5 [241]	10.5[267]	14.5[368]	11 [5]	
L35-20	D-053	A-097/98/99	Z-053		9.5 [241]	10.5[267]	16.6[422]	12 [5.5]	
535-10-1	A-093	L3S-10			8.5 [216]	12.3[325]	10 [254]	5.3 [2.4]	
535-10-2	A-094	L3S-10			17.5[446]	12.3[325]	10 [254]	7 [3.2]	
535-10-3	A-096	L3S-10			26.5[673]	12.3[325]	10 [254]	8.9 [4]	
535-15-1/535-20-1	A-097	L3S-15/20			9.5 [241]	13.8[351]	10.1[257]	6.1 [2.8]	
535-15-2/535-20-2	A-098	L3S-15/20			19.5[495]	13.8[351]	10.1[257]	8.1 [3.7]	
535-15-3/535-20-3	A-099	L3S-15/20			29.5[749]	13.8[351]	10.1[257]	10.1 [4.6]	

















FETCO CORPORATION

640 Heathrow Drive, Lincolnshire IL 60069-4205, USA

Toll-free: 1-800-FETCO99 (800-338-2699) Telephone: 1(847) 821-1177 | Fax: 1(847) 821-1178

> www.FETCO.com sales@FETCO.com

FETCO, LUXUS, Extractor, PulseBrew are registered trademarks of Food Equipment Technologies Company. Specifications to change without notice. Printed in USA 2003.