

## FEATURES

- Rotary vane 100 gph pump with strainer and pressure relief valve
- Two piece probe design with exclusive diagnostics allows for replacement without shutting off CO<sub>2</sub> or water
- Control Module enhances electrical safety by utilizing a signal level voltage on the probe.
- Stainless steel base for durability
- Stainless Steel tank for easy cleaning
- Available in 115/60 Hz and 230/50/60 Hz
- Unit is ETL approved



## Carbonator

- A more durable, reliable carbonator



Intertek  
3158001  
Model 919-0003



Intertek  
3158001  
Model 919-0003




### **SOLID STATE CONTROL MODULE**

- Enhances electrical safety by utilizing a signal level voltage on the probe.
- Removable without shut-off of CO<sub>2</sub> or water.
- LED diagnostic indicators.

### **PROBE HOUSING**

- Zero moving parts and maintenance free.
- More durable and long lasting compared to conventional float switch designs.

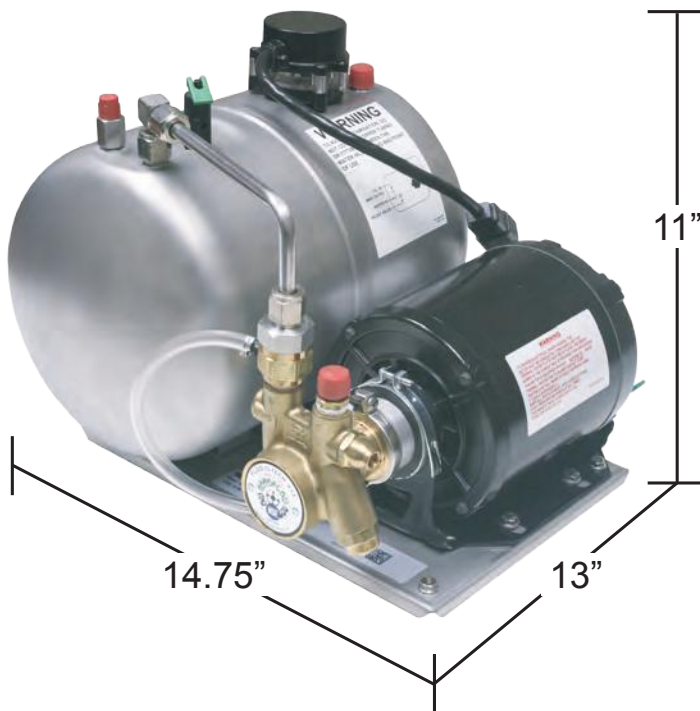

## **KEY FEATURES**

100 GPH VANE PUMP

2.5 GAL. TANK

2 SODA OUTLETS

STAINLESS STEEL BASE

115/60 HZ/1 PH

230/50/60 HZ/1 PH

240 PSI PRESSURE

RELIEF VALVE

115V, 1/3 HP, 1725 RPM

230V, 1/3 HP, 1725 RPM

C02 INLET, 1/4 MALE FLARE

WATER INLET & OUTLET

3/8 MALE FLARE

### **SPECIFICATIONS**

PART NUMBER	919-0003
DIMENSIONS	14.75"W x 13"D x 11"H
WEIGHT	29 lb.
SHIP WEIGHT	30 lb.
TANK CAPACITY	2.5 gal.
115/60 HZ	115V, 1/3 HP, 1725 RPM
230/50/60 HZ	230V, 1/3 HP, 1725 RPM



Available from Bracton.com  
 50-54 Chard Rd, Brookvale NSW 2100  
 +61 2 9938 1800 // equipment@bracton.com

