

# HANDLE OPERATED COFFEE BREWER

CBS-5000 Series

## CBS-52H-15

Twin 1.5 Gallon Brewer



Shown with 1.5 Gallon LUXUS® Thermal Dispensers (L40-15)

The CBS-5000 Series was designed for simplicity. The Handle Operated Series brewers save the operator time and effort by delivering quick and consistent results from your pre-programmed coffee recipe. It is the reliable choice for serving high-volumes of single batch coffee all day long.



**Handle operation — a quick start!**

Simply twist the handle to begin the brew cycle and in minutes your perfectly brewed coffee is ready to serve.



**Manual water faucet.**

Safely dispense hot water away from steam and brew basket.



**Set it and forget it.**

Program your recipe once and this brewer delivers consistent and repeatable results.

**FETCO®**  
TRUSTED | RELIABLE | QUALITY

## Water Specification

**Water Inlet**  
3/8" male flare fitting

**Minimum Flow Rate**  
1 1/4 gpm [4.71 lpm]

**Water Pressure**  
20-75 psig [138-517 kPa]

## Electrical Configuration


Configuration Code	Heater Configuration	Voltage	Phase	Wires	KW	Electrical Connection	Max Amp Draw	Gallon [Liter] /Hour
<b>US &amp; CANADA</b>								
C52016	2 x 3.0 kW	120/208-240	1	3+G	4.6-6.1	Terminal Block	22.0-25.4	10.5-15.0 [39.7-56.8] <sup>(1)</sup>
C52026	2 x 4.0 kW	120/208-240	1	3+G	6.1-8.1	Terminal Block	29.3-33.8	15.0-19.5 [56.8-73.8] <sup>(1)</sup>
C52036 <sup>(2)</sup>	3 x 3.0 kW	120/208-240	3	4+G	7.0-9.1	Terminal Block	19.5-22.4	16.5-22.5 [62.5-85.2] <sup>(1)</sup>
C52046 <sup>(2)</sup>	3 x 4.0 kW	120/208-240	3	4+G	9.1-12.1	Terminal Block	25.6-29.6	22.5-30.0 [85.2-113.6] <sup>(1)</sup>
C52186 <sup>(2)</sup>	3 x 4.0 kW	440-480	3	3+G	10.3-12.1	Terminal Block	13.6-14.8	22.5-30.0 [85.2-113.6] <sup>(1)</sup>
<b>INTERNATIONAL</b>								
C52076 <sup>(2)</sup>	3 x 3.0 kW	220-240/380-415	3	4+G	7.8-9.1	Terminal Block	11.8-12.9	19.5-22.5 [73.8-85.2] <sup>(1)</sup>
C52086 <sup>(2)</sup>	3 x 4.0 kW	220-240/380-415	3	4+G	10.3-12.1	Terminal Block	15.7-17.1	25.5-30.0 [96.5-113.6] <sup>(1)</sup>
C52096	2 x 3.0 kW	220-240	1	2+G	5.1-6.1	Terminal Block	23.3-24.4	13.5-15.0 [51.1-56.8] <sup>(1)</sup>
C52106	2 x 4.0 kW	220-240	1	2+G	6.8-8.1	Terminal Block	30.9-33.8	18.0-19.5 [68.1-73.8] <sup>(1)</sup>

(1) Based on standard factory settings: 4.0 minute brew time; 0% prewet; 200°F water.

(2) Requires 3 phase Electrical Power System (Z056).

## Measurements

<b>Height</b> 36" [91.4 cm]	<b>Width</b> 21" [53.3 cm]	<b>Depth</b> 16" [40.6 cm]	<b>Empty Weight</b> 82 lbs [37.2 kg]	<b>Filled Weight</b> 145 lbs [65.8 kg]	<b>Shipping Weight</b> 100 lbs [45.4 kg]	<b>Shipping Dimensions:</b> 35" x 23" x 23" [88.9 x 58.4 x 58.4 cm]
--------------------------------	-------------------------------	-------------------------------	---	---	---	--

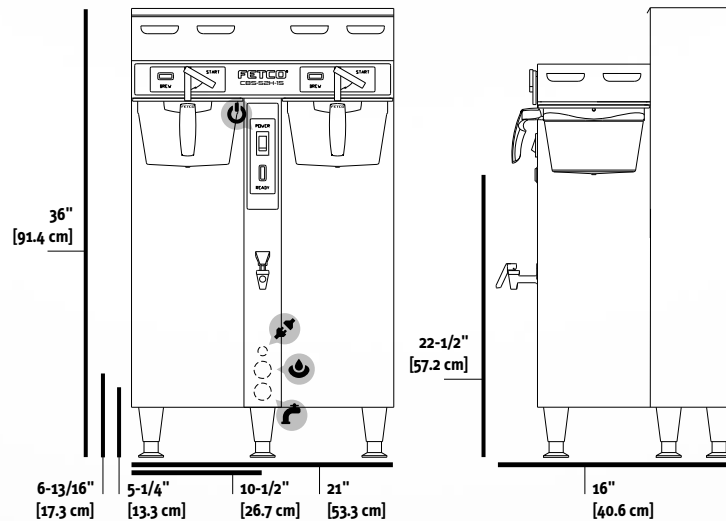

- Electrical Connector
- Tank Drain
- Water Inlet
- On / Off Switch



## Compatible Dispensers

1.5 Gallon LUXUS® Thermal Server (L4S-15) Must be used with S4S Serving Stations.	D452
1.5 Gallon LUXUS® Thermal Dispenser (L4D-15)	D449
1.5 Gallon LUXUS® Portable Thermal Dispenser (TPD-15)	D009

## Customize Your Brewer

Single Serving Station for L4S-15/20 Server	A150
Twin Serving Station for L4S-15/20 Server	A151
Triple Serving Station for L4S-15/20 Server	A152
Identifier Plates, Acrylic	A069
Hot Tea Infuser (1.5 Gallon Size)	A113
Drip Tray - Square	A137

## Cups per Hour\*

8oz.  475	12oz.  317	16oz.  238	20oz.  190
-----------	------------	------------	------------

\* Approximate based on maximum power setting.

## Paper Coffee Filters

15" x 5.5" (500/Case)	F001
-----------------------	------

## Information

fetco.com

info@fetco.com

847.719.3000  
1.800.338.2699 USA  
 847.719.3001

Food Equipment Technologies Co.  
600 Rose Road  
Lake Zurich, IL 60047  
USA