

# Accuflex Beverage Transfer Products



*Syrup tubes, water hoses and gas hoses all in one convenient cabled bundle!*

## **Bev-Seal Ultra® 974H Series Cabled Barrier Tubing/Hose Bundle**

**Construction:** Flushable **Bev-Seal Ultra®** 235 Series syrup tubes, each color coded, individually numbered and branded with date codes for traceability. In each configuration, there are two 3/8" ID PET-lined **Bevlex® Plus** 180 Series hoses specifically included to carry water at pressures up to 300 psig at 70°F. In addition one 1/4" ID polyethylene **Bev-Seal®** 176 Series hose has been included to carry carbon dioxide gas at pressures up to 250 psig at 70°F. The cable construction and silver-gray “low-friction” extruded jacket allows for convenient one-step installation. All component lines carry NSF-51 and NSF-61 listings and are branded accordingly. Sequential footage marks on the bundle jacket add to the ease of installation.


### **Nominal Specifications**

Part Number	Standard Package	Description & Configuration for Each Bundle Film Wrapped — Silver-Gray Extruded Jacket	Max. Bundle OD (in)	Weight per Pkg.		Min. Bend Radius (in)	Clamp Size (mm)
				(lbs)	(kgs)		
974H-00080012-01	100' Coil	8 – .380 x .500 <b>Bev-Seal Ultra®</b> 235 Syrup Tubes	2.3	75	34	10	14.0
974H-00080012-02	200' Reel	2 – .375 x .593 <b>Bevlex® Plus</b> 180 Water Hoses	2.3	160	73	10	15.7
974H-00080012-05	500' Reel	1 – .265 x .457 <b>Bev-Seal®</b> 176 Gas Hose	2.3	450	204	10	13.3
974H-00100012-01	100' Coil	10 – .380 x .500 <b>Bev-Seal Ultra®</b> 235 Syrup Tubes	2.3	83	38	10	14.0
974H-00100012-02	200' Reel	2 – .375 x .593 <b>Bevlex® Plus</b> 180 Water Hoses	2.3	189	86	10	15.7
974H-00100012-05	500' Reel	1 – .265 x .457 <b>Bev-Seal®</b> 176 Gas Hose	2.3	466	212	10	13.3
974H-00120012-01	100' Coil	12 – .380 x .500 <b>Bev-Seal Ultra®</b> 235 Syrup Tubes	2.5	92	42	12	14.0
974H-00120012-02	200' Reel	2 – .375 x .593 <b>Bevlex® Plus</b> 180 Water Hoses	2.5	197	90	12	15.7
974H-00120012-05	500' Reel	1 – .265 x .457 <b>Bev-Seal®</b> 176 Gas Hose	2.5	510	231	12	13.3
974H-00140012-01	100' Coil	14 – .380 x .500 <b>Bev-Seal Ultra®</b> 235 Syrup Tubes	2.6	100	45	13	14.0
974H-00140012-02	200' Reel	2 – .375 x .593 <b>Bevlex® Plus</b> 180 Water Hoses	2.6	226	103	13	15.7
974H-00140012-05	500' Reel	1 – .265 x .457 <b>Bev-Seal®</b> 176 Gas Hose	2.6	554	252	13	13.3
974H-00160012-01	100' Coil	16 – .380 x .500 <b>Bev-Seal Ultra®</b> 235 Syrup Tubes	2.8	108	49	14	14.0
974H-00160012-02	200' Reel	2 – .375 x .593 <b>Bevlex® Plus</b> 180 Water Hoses	2.8	248	113	14	15.7
974H-00160012-05	500' Reel	1 – .265 x .457 <b>Bev-Seal®</b> 176 Gas Hose	2.8	598	272	14	13.3

**Bevlex®** and **Bev-Seal Ultra®** are registered trademarks of Kuriyama of America, Inc., Schaumburg, IL, USA

Because we continually examine ways to improve our products, we reserve the right to alter specifications without notice.

# Accuflex Beverage Transfer Products

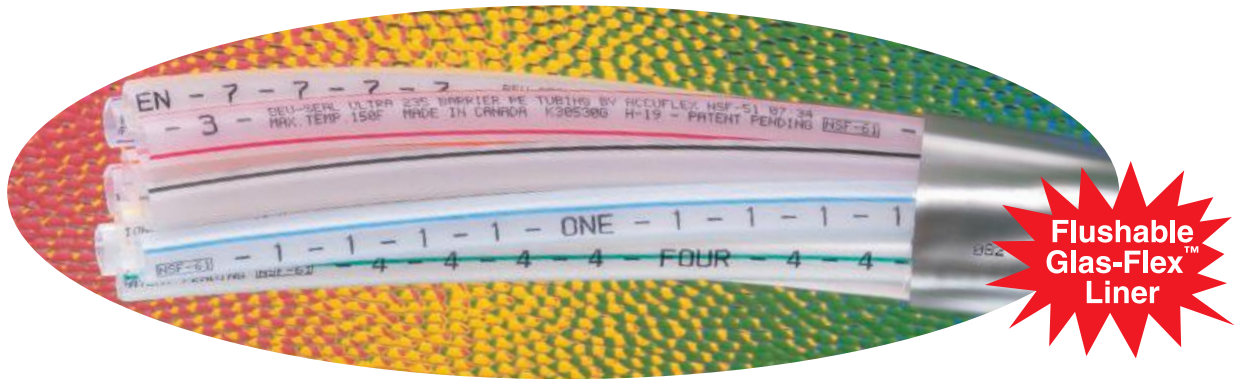

## Bev-Seal Ultra® 974 Series Cabled Barrier Tubing Bundle

**Construction:** Flushable Bev-Seal Ultra® 235 Series tubes (see page 13), each color coded, individually numbered and branded with NSF-51 and NSF-61 listings and date codes for traceability. Special film wrap over cabled tubes offers excellent flexibility and tight bend capabilities. Silver-gray extruded jacket, with slip agent to minimize friction, is branded with product identification, NSF listing marks, and sequential footage markings for ease of measurement. Other jacket colors available (some limitations may apply).

Nominal Specifications							
Part Number	Standard Package	Description & Configuration Film Wrapped — Silver-Gray Extruded Jacket	Max. Bundle OD (in)	Weight per Pkg		Min. Bend Radius (in)	Clamp Size (mm)
				(lbs)	(kgs)		
974-07010-01	100' Coil	7 – .265 x .375 Bev-Seal Ultra® Tubes	1.5	39	18	5	10.0
974-07010-02	200' Reel	1 – .380 x .500 Bev-Seal Ultra® Tube		87	35		14.0
974-07010-05	500' Reel			207	94		
974-08020-01	100' Coil	8 – .265 x .375 Bev-Seal Ultra® Tubes	1.7	48	22	6	10.0
974-08020-02	200' Reel	2 – .380 x .500 Bev-Seal Ultra® Tubes		105	48		14.0
974-08020-05	500' Reel			240	109		
974-08040-01	100' Coil	8 – .265 x .375 Bev-Seal Ultra® Tubes	2.0	51	23	7	10.0
974-08040-02	200' Reel	4 – .380 x .500 Bev-Seal Ultra® Tubes		116	53		14.0
974-08040-05	500' Reel			268	122		
974-10020-01	100' Coil	10 – .265 x .375 Bev-Seal Ultra® Tubes	2.0	51	23	7	10.0
974-10020-02	200' Reel	2 – .380 x .500 Bev-Seal Ultra® Tubes		116	53		14.0
974-10020-05	500' Reel			268	122		
974-10040-01	100' Coil	10 – .265 x .375 Bev-Seal Ultra® Tubes	2.2	62	28	8	10.0
974-10040-02	200' Reel	4 – .380 x .500 Bev-Seal Ultra® Tubes		139	63		14.0
974-10040-05	500' Reel			323	147		
974-00080-01	100' Coil		2.0	53	24	8	14.0
974-00080-02	200' Reel	8 – .380 x .500 Bev-Seal Ultra® Tubes		121	55		
974-00080-05	500' Reel			273	129		
974-00100-01	100' Coil		2.2	58	26	9	14.0
974-00100-02	200' Reel	10 – .380 x .500 Bev-Seal Ultra® Tubes		139	63		
974-00100-05	500' Reel			341	155		
974-00120-01	100' Coil		2.2	67	30	10	14.0
974-00120-02	200' Reel	12 – .380 x .500 Bev-Seal Ultra® Tubes		147	67		
974-00120-05	500' Reel			385	175		
974-00140-01	100' Coil		2.6	75	34	10	14.0
974-00140-02	200' Reel	14 – .380 x .500 Bev-Seal Ultra® Tubes		176	80		
974-00140-05	500' Reel			429	195		
974-00160-01	100' Coil		3.0	83	38	12	14.0
974-00160-02	200' Reel	16 – .380 x .500 Bev-Seal Ultra® Tubes		198	90		
974-00160-05	500' Reel			473	215		

Because we continually examine ways to improve our products, we reserve the right to alter specifications without notice.